LADDERS

Double sided aluminium KRAUSE step ladder - Dopplo type


EN 131

Code: see table

Double sided KRAUSE step ladders, made of aluminium, are used as double ladders (type Λ) bilaterally ascendable. Ladders are provided with two safety straps. Rails are made of rectangular pipe and provide proper stability. Rungs are ribbed, 80 mm wide, for safe climbing and comfortable use.

At the base, ladders are provided with anti-slip caps to provide better adherence to smooth surfaces and to prevent the accidental slip of the ladder.
Dopplo ladders can be stored efficiently, as their width dimension is of 16 cm in retracted position.



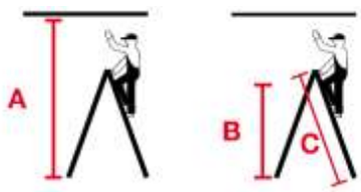





Ladder type	Dopplo					
Ladder code	120328	120335	120342	120359	120366	120373
Number of sections x rungs	**2 x 3**	**2 x 4**	**2 x 5**	**2 x 6**	**2 x 7**	**2 x 8**
Working height A (m)	2,45	2,65	2,85	3,10	3,30	3,50
Total height B (m)	0,45	0,65	0,85	1,10	1,30	1,50
Total length C (m)	0,75	0,95	1,20	1,40	1,65	1,85
Transport dimensions (L/w/h) (m)	0,75/0,42/0,16	0,95/0,45/0,16	1,20/0,47/0,16	1,40/0,50/0,16	1,65/0,52/0,16	1,85/0,55/0,16
Weight (kg)	2,4	3,2	4,0	4,8	5,7	6,5

Double aluminium KRAUSE ladder - Solidy type


EN 131

Code: see table

KRAUSE ladder Solidy type is used as a double ladder (type Λ) with unilateral ascension, high safety top rail and anti-slip platform.
Rails are made of rectangular pipe and provide good stability.
Rungs are ribbed, 80-mm wide and provide conditions for comfortable ascension and standing.

At the base, ladders are provided with anti-slip caps to provide better adherence to smooth surfaces and to prevent the accidental slip of the ladder.



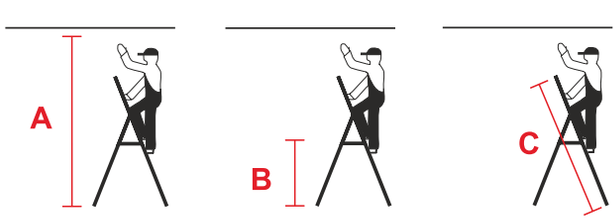

Ladder type	Corda Solidy					
Ladder code	000712	000706	000729	000736	000743	000767
Number of rungs	**3**	**4**	**5**	**6**	**7**	**8**
Working height A (m)	2,65	285	3,05	3,25	3,50	3,75
Total height B (m)	0,65	0,85	1,05	1,25	1,50	1,75
Total length C (m)	1,35	1,60	1,80	2,05	2,25	2,50
Transport dimensions (L/w/h) (m)	1,35/0,41/0,12	1,60/0,44/0,12	1,80/0,47/0,12	2,05/0,50/0,12	2,25/0,52/0,12	2,50/0,55/0,12
Weight (kg)	2,50	3,50	4,50	5,00	6,00	7,00